

Mortar bedding and haunching to cover and frame.

Precast concrete slab or GEN 3 concrete plinth c.300mm x 150mm to allow construction of Class B engineering brickwork.


Ø350mm restricted access opening

Ø50mm lifting eye 3nr in total

Removable Orifice filter screen

Connection to pipework achieved using standard push-fit coupling or adjustable flexible coupling.

150mm thick GEN 3 concrete base

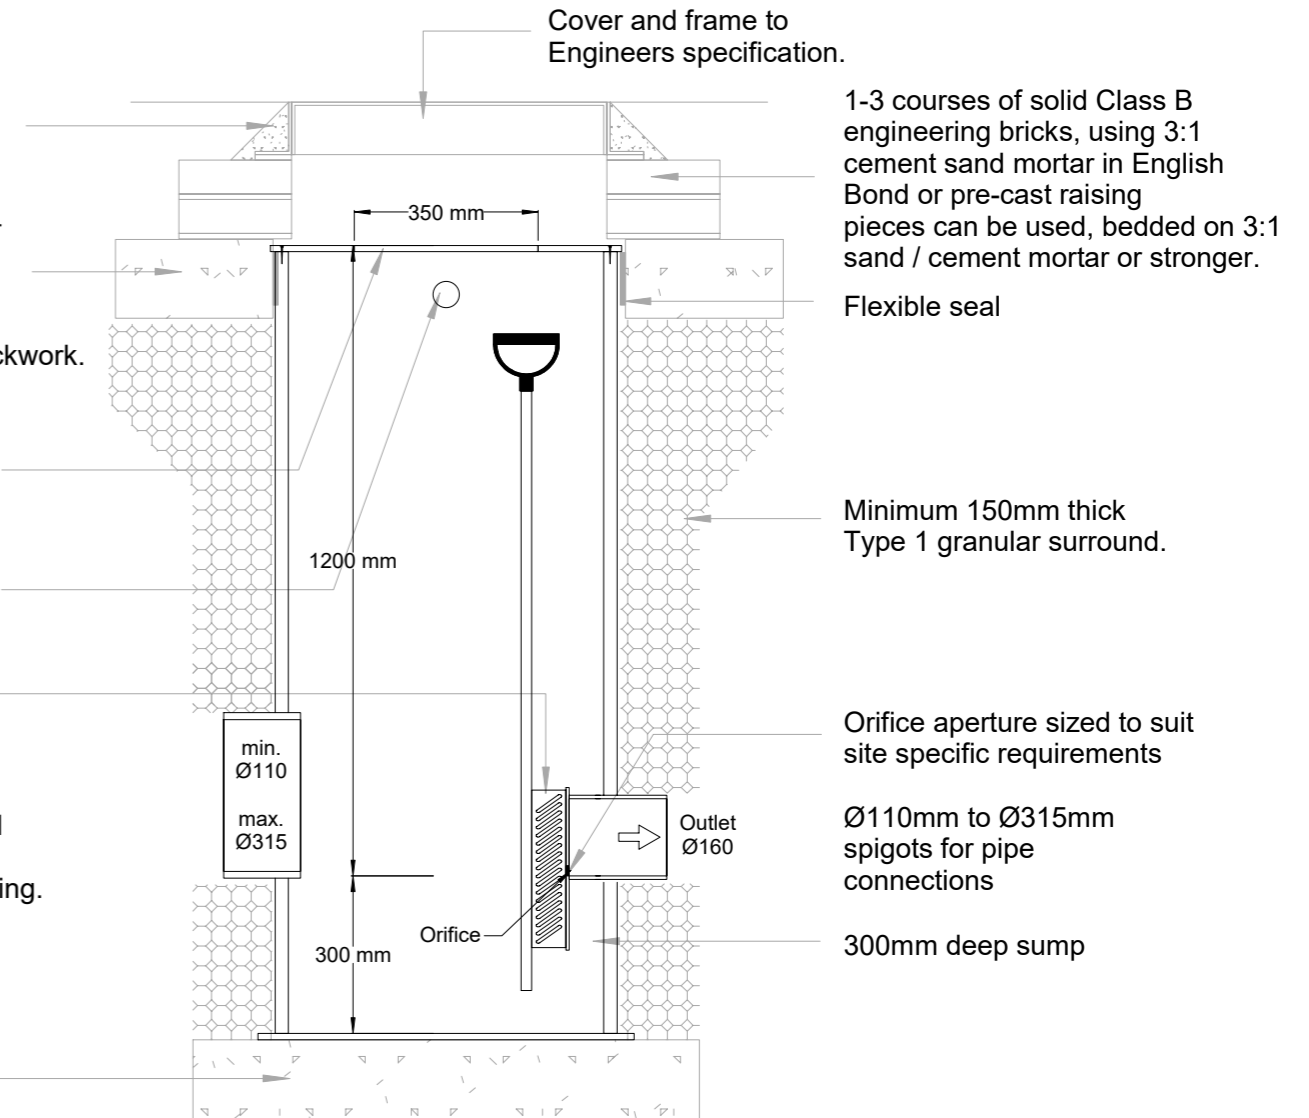

**INSTALLATION DETAIL**  
**WASP06100BF Series**  
 Prefabricated Orifice Flow Control Chamber with Removable Box Filter  
 Ø600 up to 2.0m deep chamber  
 By SEL Environmental Tel: 01254 589987



Tel: 01254 589987

WASP06102BF - Up to 1500mm deep

WASP06103BF - Up to 2000mm deep