

## High Performance Diffuser 2130x355x300; Ø160mm Sockets

PVOD05202


### Description

The PVOD05202 - High Performance Diffuser 2130x355x300; 160mm Ø Sockets is designed for the efficient diffusion of collected surface water runoff into permeable aggregates. This technique can be utilised in conjunction with both pervious and impervious surfacings. The PVOD05202 units can also be used to supplement the storage provided within permeable aggregate layers without increasing construction depths, or to form a propriety soakaway beneath a driveway or other trafficked hardstanding.



### Packaging Details

Element	Value	Unit
Packaging unit dimension	2158 x 712 x 302 (LxWxD)	mm
Packaging unit weight	18	kg
Number of units per pallet	18	nr
Pallet dimensions	2400 x 1200 x 150 (LxWxD)	mm
Pallet weight	374	kg

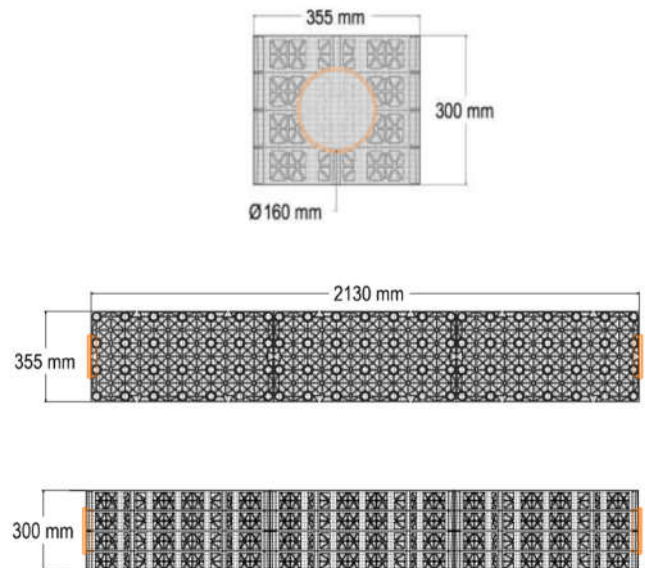

### Specification

Element	Value	Unit
Unit length	2130	mm
Unit width	355	mm
Unit depth	300	mm
Socket ID Ø	160	mm
No. of sockets	2	nr
Approximate storage volume	210	L
Effective perforated surface area	59	%
Maximum roof catchment area	250	m <sup>2</sup>
Unit weight	18	kg
Material	HDPE / PP	

Effective water dispersal

Standard PVC-u Ø160mm Socket Connection

Lightweight, high strength construction